

# CME Booster



A variable speed pump that adjust accordingly to water demand, resulting in lower running costs. All wetted components are constructed from high quality stainless steel ensuring, the water quality is not affected by pump materials. The pump will provide constant pressure at the tap (up to pump capacity), regardless of variation in demand or inlet pressure.



## Features

### Robust design

All wetted parts are made from high quality stainless steel to ensure the longest life possible.

### Energy saving

The frequency controller of the CME Booster matches the power consumption with the required water output, helping to conserve energy.

### Easy installation

The CME Booster is very easy to install. Once the booster has been connected to the pipework, it is simply a matter of putting the plug into a socket, and the system is operational.

### Quiet operation

The CME Booster operates quietly, at around 55 decibels, significantly quieter than most pumps currently available on the market.

### User-friendly interface

The user-friendly interface features LED indicators showing operational status and buttons for pressure adjustment.

### Protective features


The CME Booster features dry run protection to automatically stop the pump if the water source runs out. The pump is also protected against any accidental overload by built-in thermal protection. These protective features help to ensure the longest life possible.

## Applications

- Mains boosting
- Household water supply
- Pressure boosting from above ground water tanks
- Light industrial use



## Performance

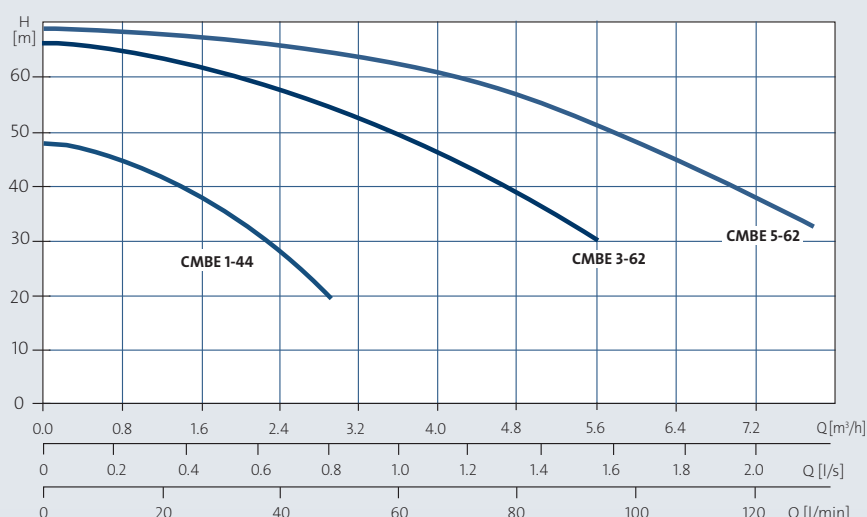

## Operating Conditions

### System pressure

Max. 10 bar

### Liquid temperature

0 °C to 60 °C

### Ambient temperature

Max. 55 °C

### Relative air humidity

Max. 95 %

## Technical Data

### Mains voltage

1 x 240 V, 50 Hz

### Enclosure class

IP55

### Insulation class

F


### Sound pressure level

< 55 dB

### Approvals and markings

ASNZ4020, CE

## Dimensions

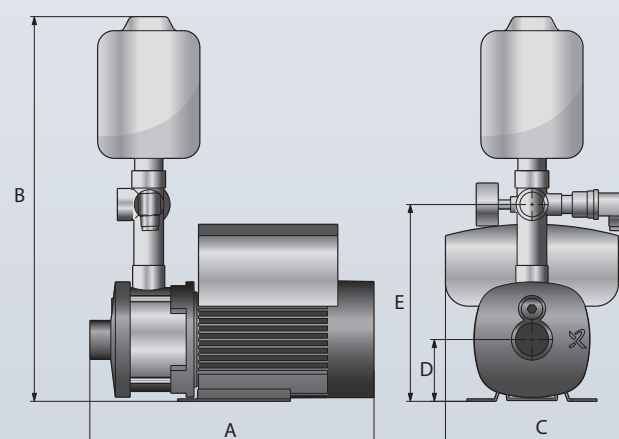

Model	Power (kW)	Connections		Dimensions (mm)					Weight (kg)
		Outlet	Inlet	A	B	C	D	E	
CME 1-44	0.55	1" F	1" F	345	467	221	75	239	16.1
CME 3-62	1.1	1" F	1" F	345	467	221	75	239	17.4
CME 5-62	1.5	1" F	1¼" F	345	467	221	75	239	18.8

Old models		Suitable replacement models
CH-PC	CM Booster	CME Booster
CH2-40 PC	CMB 3-3	CMBE 1-44
CH4-50 PC	CMB 5-5	CMBE 3-62
CH4-60 PC		CMBE 5-62

Please Note: Conversion at 250 kPa